



JFS-ANN2

LCD ANNUNCIATOR



Features

- Operates with JFS-A1/JFS-A2 Releasing Panel
- Industry leading 4 line by 40 Character LCD
- Common buttons for navigation
- Common LEDs for status indication
- 31 annunciator per panel
- Maximum wire length of 6,500 feet
- Size (W x H x D): 9 13/16" x 7 1/6" x 1 11/16"
- Electrical Specs
 - Standby Current 20 mA
 - Alarm Current 50 mA
- For JFS-IP Series and JFS-A Series



P/N 98725

Description


The JFS-ANN2 is a LCD remote annunciator for the JFS-IP Series and JFS-A Series addressable fire control panels. The JFS-ANN2 communicates using a RS-485 connection to the main panel providing common indication of Alarms, Supervisory, Trouble and other system status and control functions.

The JFS-ANN2 features a 4x40, 160 character LCD display with LED's for Power, Alarm, Supervisory, Trouble, and Silenced conditions. It can be mounted on a single gang electrical box or a four square electrical box. The annunciator is enclosed in a sheet metal enclosure and has a Potter lock securing the keypad.


Installation

The JFS-ANN2 is connected to the fire alarm control panel using a four wire RS-485 connection. The connection is power limited and supervised. Up to thirty-one (31) JFS-ANN2 LCD annunciators can be connected using Class B or Class A wiring. Class A wiring requires an optional CA-6075 or CA-6500 Class A Expander depending on the control panel (refer to control panel datasheets).

Class B Wiring Example

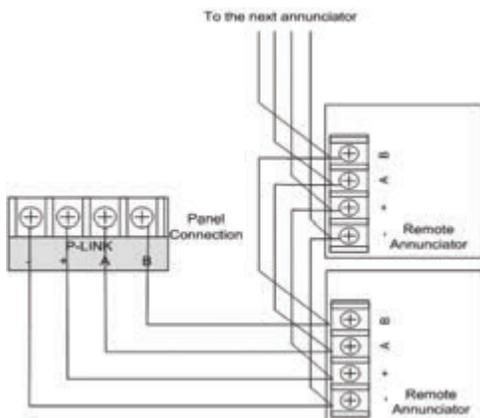

Class A Wiring Example

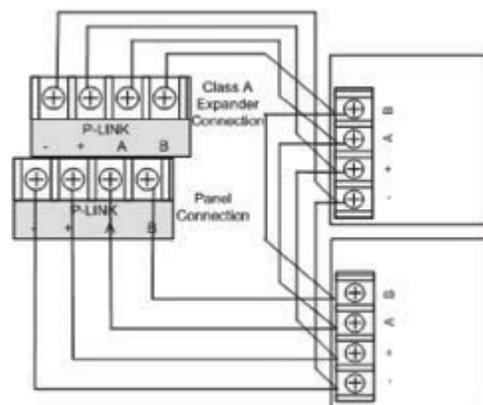

JANUS
FIRE SYSTEMS®



Ordering Information

Model Number	Description	P/N
JFS-ANN2	Annunciator, Remote, LCD	98725

Note: Approvals/Listings maintained by and manufactured by Potter Electric Signal Company.

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rupcich Drive
Millennium Park
Crown Point, IN 46307
TEL: (219) 663-1600 FAX: (219) 663-4562
e-mail: info@janusfiresystems.com
www.janusfiresystems.com