




# ARS-2

## WEATHERPROOF ABORT/RELEASING STATION

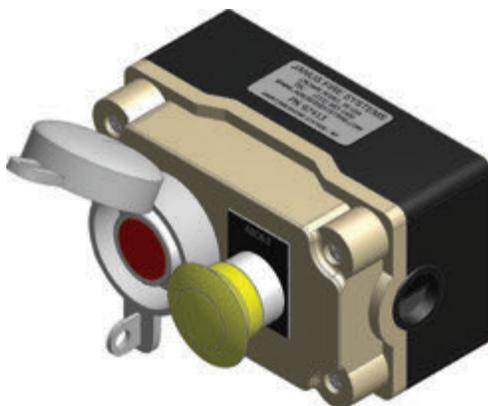

### Features

- NEMA 4X Enclosure
- Dual Action Momentary Release
- Deadman Style Abort
- Surface Mount
- Abort – Two N.O. and Two N.C. Contacts
- Manual Release – Two N.O. and Two N.C. Contacts
- Enclosure: UL Listed, CE, CSA
- Switches: UL Listed, CE, CSA

P/N: 97413


### Description

The Janus Fire Systems® ARS-2 Weatherproof Abort/Releasing Station combines the function of a manual release station and an abort station into a single unit. The manual release is achieved with a red flush momentary pushbutton that is protected by a lift-open button cover. A yellow tamper seal is provided for additional security to prevent accidental operation. The abort is achieved with a yellow deadman style mushroom head pushbutton. The ARS-2 has an aluminum enclosure that is rated NEMA 4X for outdoor use. It ships with an operation instruction plate to be mounted above the station.

### Operation

The ARS-2 abort function is initiated by pressing and holding the yellow pushbutton. The ARS-2 release function is operated by breaking the yellow tamper seal, lifting the button cover, and depressing the red flush pushbutton.


### Dimensions

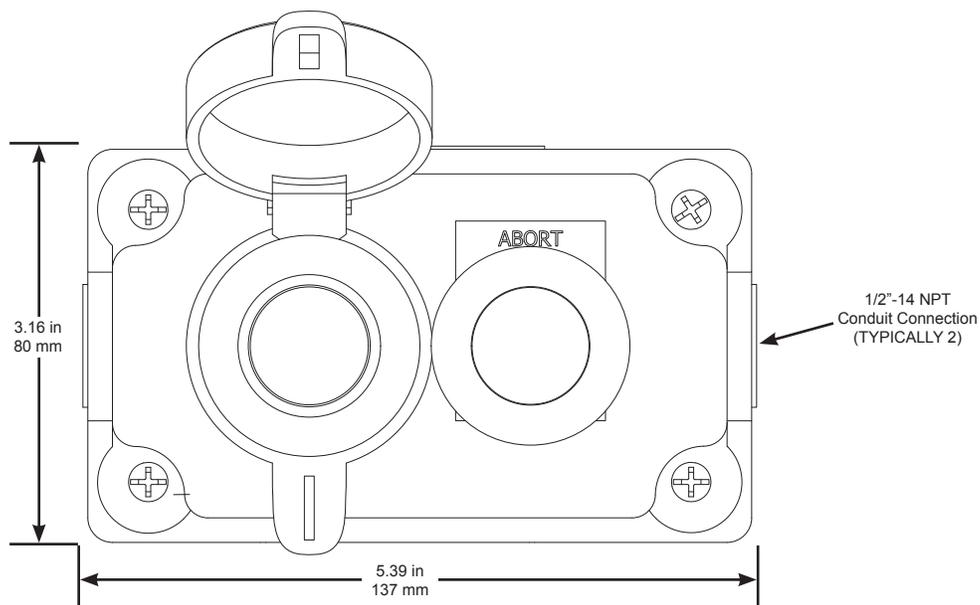

Station Depth: Approx. 4 in (101.6 mm)



## Schematic

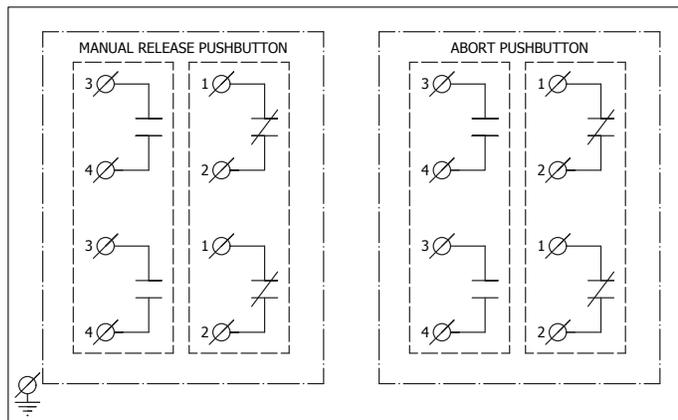

SWITCH CONFIGURATION  
(2 CONTACT STACKABLE)

### Specifications

Temperature:	-13° to 120°F (-25° to 48.9°C)	
Weight:	1.5 lbs (0.68 kg)	
Dimensions:	3.16 in H x 5.39 in W x 4 in D (80 mm x 137 mm x 101.6 mm)	
Color:	Face Plate – Painted Aluminum Mushroom Head Pushbutton – Yellow Flush Pushbutton – Red	
Contacts Rating:	Manual Release Pushbutton:	4 amps at 30 VAC 0.5 amps at 30 VDC
	Abort Pushbutton:	4 amps at 30 VAC 0.5 amps at 30 VDC
Terminal Connections:	2 x 16 AWG, 1 x 14 AWG	

### Ordering Information

Model	P/N	Description	Ship Wt. lb (kg)
ARS-2	97413	Abort/Releasing Station - Weatherproof	1.5 (0.7)
N/A	01387	Tamper Seal, Yellow, Polyprophlene (Spare)	0.1 (0.05)
N/A	99997	N.C. Contact Block - Red	0.1 (0.05)
N/A	99998	N.O. Contact Block - Green	0.1 (0.05)

*Note: Listings and Approval are maintained by Teknik Electric Pvt Ltd*

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rucpich Drive  
Millennium Park  
Crown Point, IN 46307  
TEL: (219) 663-1600 FAX: (219) 663-4562  
e-mail: info@janusfiresystems.com  
www.janusfiresystems.com